


KB121.2 12V 1.2Ah



Kaise Battery series are Top terminal VRLA AGM battery for General use. With advanced manufacturing technique and industry scale, KB series delivers high energy density and high reliability performance, highly suited for UPS systems, security and alarm systems, telecommunication, utilities, emergency light systems, CATV and other backup applications.

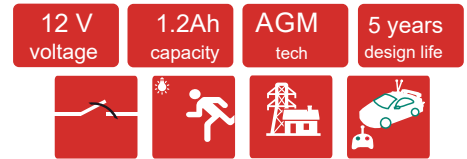


Complied standards

- IEC 60896-21/22
- GB/T19638
- JIS C8704
- BS6290 part 4

Technical Specifications

Nominal Voltage (V)	12 (3 cells per unit)
Designed Floating Life (25°C)	5 Years
Nominal Capacity (25°C)	1.2 Ah @ 20HR-rate (to 1.75Vpc)
Dimension (mm)	L98 x W43 x H53 x TH57
Approx. Weight	0.5 kg (1.1 lbs)
Terminal Type	Fasten Tab F1
Internal Resistance	Approx. 0.12 Ohm (fully charged @ 25°C)
Max. Charge Current	0.36 A
Max. Discharge Current (5S)	18A
Short Circuit Current	150A
Self Discharge	Approx. 2.5% per month @ 20°C
Ambient Temperature	Discharge: -20~55°C Charge: -20~50°C Storage: -20~45°C
Float Charge Voltage	13.6 - 13.8 V @25°C (-3mV/cell/ C)
Equalize and cycle Use Charge Voltage	14.7 - 14.9V @25 C
Container Material	ABS (UL94-V0 optional)

Battery Dimensions

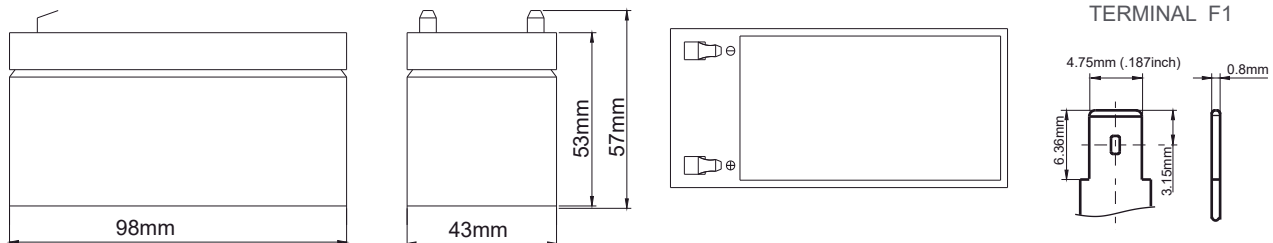


Constant Current Discharge Characteristics: Amps (25°C)

V/cell	15min	30min	1hr	3hr	5hr	10hr	20hr
1.60	2.08	1.17	0.65	0.28	0.22	0.12	0.06
1.65	2.00	1.13	0.63	0.28	0.21	0.12	0.06
1.70	1.91	1.08	0.62	0.27	0.21	0.11	0.06
1.75	1.82	1.04	0.60	0.26	0.21	0.11	0.06
1.80	1.73	1.00	0.59	0.25	0.20	0.11	0.06


Constant Power Discharge Characteristics: W/Cell (25°C)

V/cell	15min	30min	1hr	3hr	5hr	10hr	20hr
1.60	3.99	2.20	1.32	0.61	0.39	0.24	0.13
1.65	3.83	2.11	1.26	0.59	0.39	0.24	0.13
1.70	3.67	2.04	1.20	0.58	0.38	0.23	0.12
1.75	3.54	1.95	1.14	0.56	0.37	0.23	0.12
1.80	3.37	1.88	1.10	0.54	0.36	0.23	0.12


Charge Characteristic

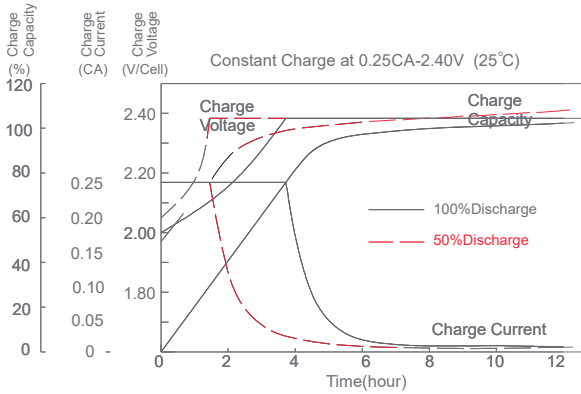


Discharge Characteristic (25°C)

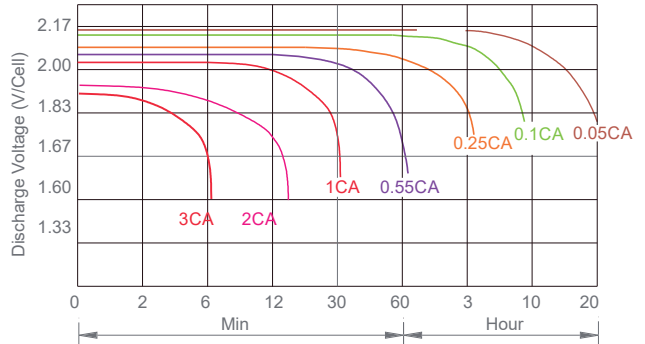


Temperature vs Float Life

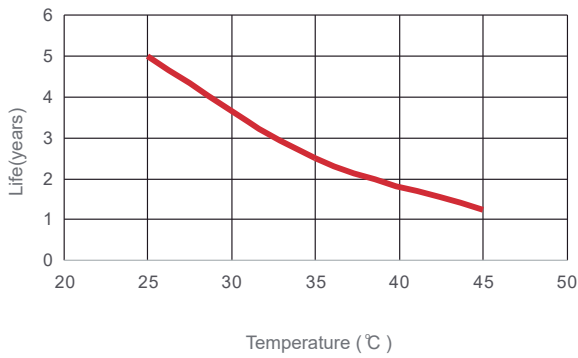


Self discharge characteristics

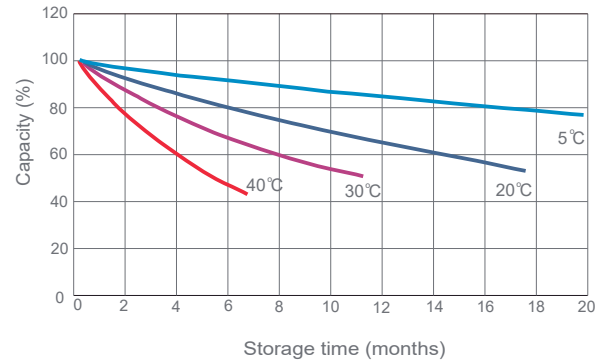

Float voltage vs Float life

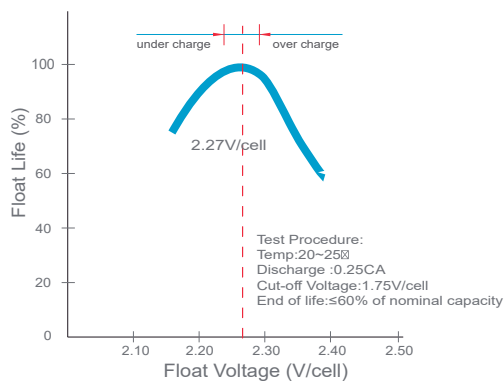

Capacity vs Temperature

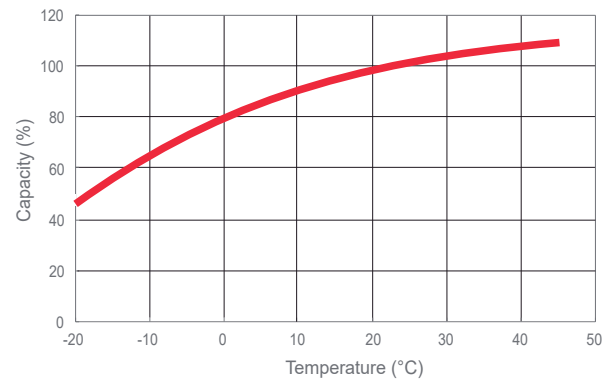

Final voltage settings recommended according to the discharge current

Discharge Current I (A)	$I \leq 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.70V_{pc}$	$\geq 1.60V_{pc}$